MODEL GEN-5400
PRESSURIZED SOFT SERVE FREEZER



FEATURES

This high-capacity soft serve freezer features two distinct flavors and a perfectly blended twist for added variety.

Twist Feature
Dispenses two separate flavors or an equal combination of both, providing versatile menu options.

Precision Control
The Virtual Quality Management System™ monitors temperature to ensure superior taste and quality.

Patented Mix Transfer System
The simplest and most reliable pressurized system available for consistent product flow.

Flexible Mix Holding System
Pumps directly from bags or mix containers for seamless operation.

Scroll Compressor Technology
Increases capacity, reliability, and efficiency for continuous service.

Long Lasting Scraper Blades
Durable reversible scraper blades minimizes replacements while ensuring a smooth, consistent texture for premium-quality frozen treats.

Superior Low Temperature Refrigeration System
Industry-leading cooling technology maximizes production and product quality.

Standby Mode
Reduces energy costs while maintaining safe product storage during non-business hours.


PERFECT FOR

- Custard Shops
- Stadiums
- Sports Arenas

Electro Freeze®

Electro Freeze® / H.C. Duke & Son, LLC | 2116 8th Ave, East Moline, 61244 | 309.755.4553 | sales@electrofreeze.com | www.electrofreeze.com

MODEL GEN-5400 SPECIFICATIONS

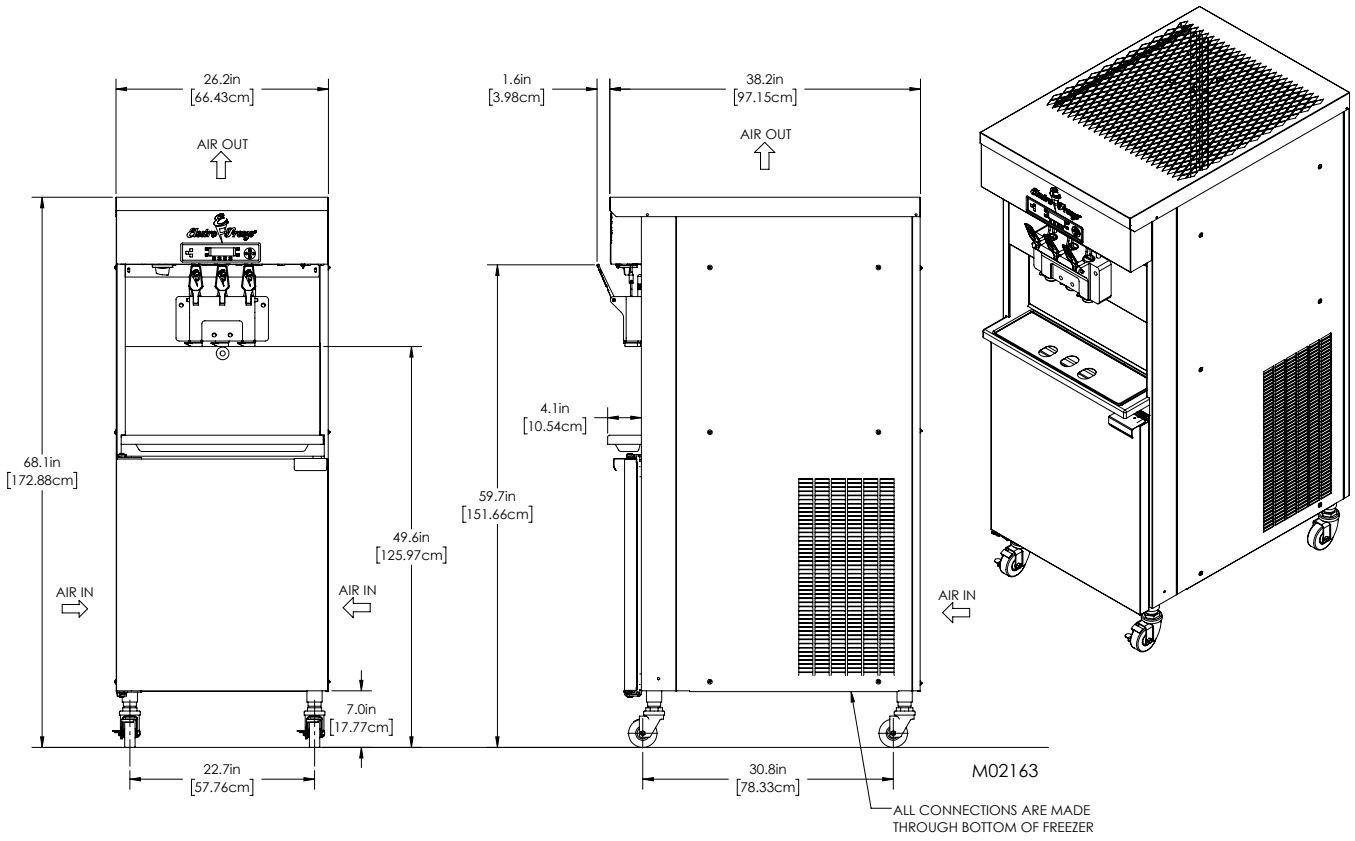

Weight

Net	847 lbs	384.19 kg
Crated	948 lbs	430 kg

Volume

58.42 cubic ft	1.65 cubic m

Dimensions

26.2" x 38.2" x 68.1"
66.43cm x 97.15cm x 172.88cm

Freezing Cylinder Capacity

Two - 5 qts (4.7 liters) each

Mix Hopper Capacity

Two - 30 quarts (28.4 liters) each

Refrigerant Types*

Two, 11,000 Btuh

R404a	R452a

Separate Cabinet Refrigerant

One, 1,200 Btuh

R134a

Beater Motor

Two, 2 hp

**Customer is responsible for complying with local refrigeration regulations.*

08/2026

Electrical

	Max Fuse Size	Min Circuit Ampacity
208-230/60/1 Air	29	29
208-230/60/1 Water	27	27.5
208-230/60/3 Air	25	20
208-230/60/3 Water	25	19

Exterior Space Required

Air Cooled : 6" (15.2 cm) air space required at rear panel or both side panels and 24" (61 cm) air space above unit for circulation

Optional Features

Remote Air Cooled System: additional configuration required, contact Electro Freeze® for more information

Cerified and/or listed by:

NSF

c UL us* LISTED

**UL listed and listed by Underwriters Laboratories under Candian Naitonal Standard C22.2 No. 120-13*

DISTRIBUTOR LOCATOR

WELBILT an Ali Group Company