MODEL GEN-5420
PRESSURIZED SOFT SERVE FREEZER



FEATURES

Designed for peak performance, this pressurized soft serve freezer dispenses two separate flavors; making it ideal for busy operations where multiple team members can serve simultaneously.

Patented Mix Transfer System
The simplest and most reliable pressurized system available.

Flexible Mix Holding System
Pumps mix directly from bags or containers, adapting to your operation's needs.

Precision Control
The Virtual Quality Management System™ monitors temperature to ensure superior taste and quality.

Innovative Auger Technology
Gently blends for optimal texture and consistency.

Long Lasting Scraper Blades
Durable reversible scraper blades minimizes replacements while ensuring a smooth, consistent texture for premium-quality frozen treats.

Standby Mode
Reduces energy costs while safely holding product during non-business hours.

Scroll Compressor Technology
Increases capacity, reliability, and efficiency for continuous service.


PERFECT FOR

- High-Volume Cafeterias
- Restaurants
- Ice Cream Shops
- Stadiums

Electro Freeze®

Electro Freeze® / H.C. Duke & Son, LLC | 2116 8th Ave, East Moline, 61244 | 309.755.4553 | sales@electrofreeze.com | www.electrofreeze.com

MODEL GEN-5420
SPECIFICATIONS

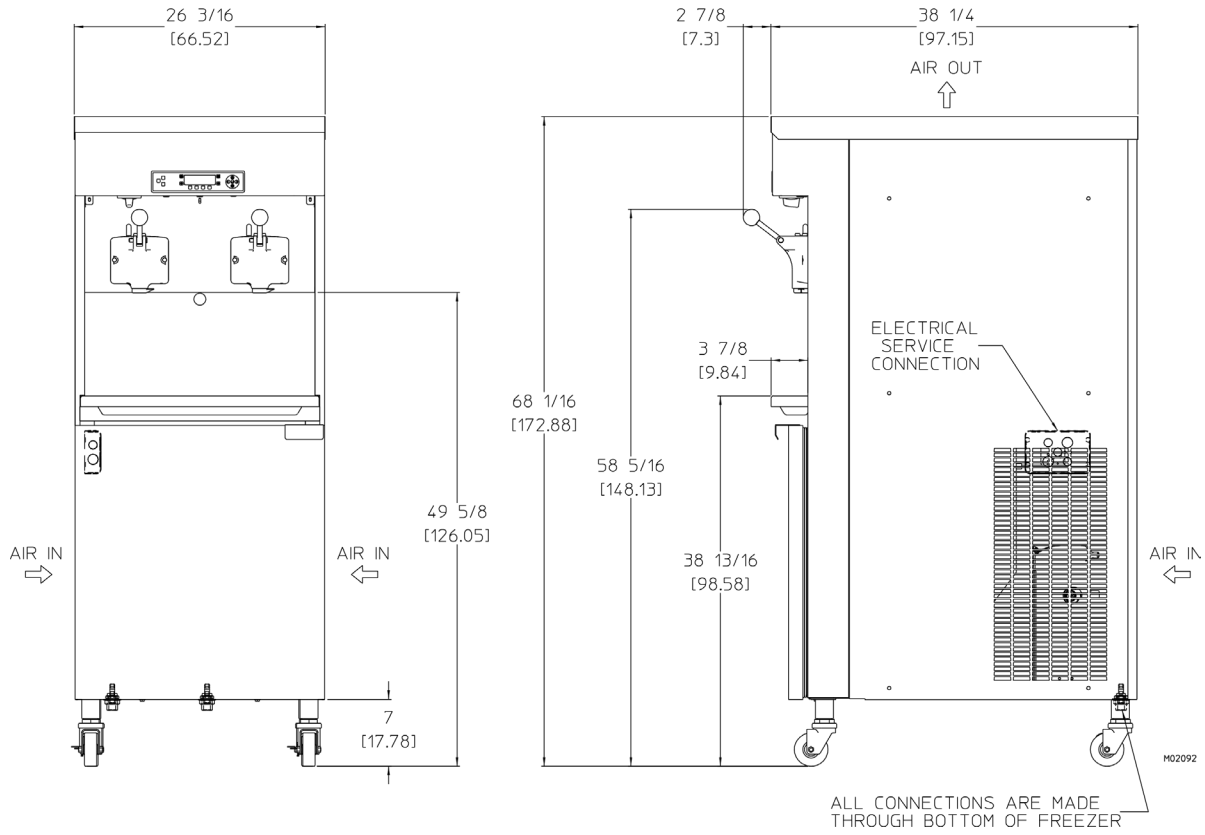

Weight		
Net	847 lbs	384 kg
Crated	915 lbs	415 kg

Volume		
	58.42 cubic ft	1.65 cubic m

Dimensions	
	26-1/8" x 38-1/4" x 70-1/8"
	66.52cm x 97.15cm x 172.88cm

Freezing Cylinder Capacity
Two - 5 qts (4.7 liters) each

Mix Hopper Capacity
Two - 30 quarts (28.39 liters) each

Refrigerant Types*		
	Two, 11,000 Btuh	
	R404a	R452a

Separate Cabinet Refrigerant
One, 1,200 Btuh
R134a

Beater Motor
Two, 2 hp

**Customer is responsible for complying with local refrigeration regulations.*

Electrical		
	Max Fuse Size	**Min Circuit Ampacity**
208-230/60/1 Air	29 A	29 A
208-230/60/1 Water	27 A	27.5 A
208-230/60/3 Air	25 A	20 A
208-230/60/3 Water	25 A	19 A

Exterior Space Required

Air Cooled : 6" (15.2 cm) air space required at rear panel or both side panels and 24" (61 cm) air space above unit for circulation

Optional Features

Remote Air Cooled System: additional configuration required, contact Electro Freeze® for more information

Cerified and/or listed by:

NSF

c UL us LISTED

**UL listed and listed by Underwriters Laboratories under Candian Naitonal Standard C22.2 No. 120-13*

DISTRIBUTOR LOCATOR

WELBILT an Ali Group Company

08/2026